

### S-Drive

100% duty cycle operator for the busiest of commercial sectional doors

### GSDK-R2.4M-GLCPSRK

Commercial Door Operators / Sectional Door Operator / S-Drive

With constant duty cycle, battery backup onboard and the industry's best warranty, the Grifco S-Drive is indeed the Smooth Operator. It is purpose built for high-cycle, highly demanding commercial sectional doors found in car parks, emergency services buildings and commercial tenancies.

#### Key Features

- The quiet, DC motor and purpose-designed gearbox deliver extremely smooth and fast door cycles, with soft start and soft stop
- The integral logic boards offer ultimate adaptability to meet the demanding needs of carpark applications
- The extremely durable rail and innovative sliding trolley have been engineered to meet the high-cycle demands of busy carpark doors
- The operator has been thoughtfully designed for low ceiling carpark applications, with a low profile, lockable enclosure
- Integral Battery Backup (BBU) offers ultimate reliability for numerous cycles in the absence of power

#### What's in the Kit?

S-Drive Operator with Integral Battery Backup (BBU), Rail for door max 2.4m high, GLCPS Light Curtain, 2 x E960G 4-Channel Transmitters

#### Information for Sectional Doors

All Grifco sectional door operators are designed for spring-balanced vertically moving, overhead sectional doors, driven with a centrally mounted rail and trolley system. All the operators have a recommended maximum sectional door area and door height listed in the relevant specification table.

All recommended sectional door sizes are based on a "standard sectional door" (refer below):

- The door is vertically operated
- The door is an overhead type
- The door is correctly spring balanced
- When correctly balanced, the door has a maximum lifting weight of 20kg
- The door is in good mechanical condition and operates smoothly


#### Model Details

<b>Part No.</b>	GSDK-R2.4M-GLCPSRK
<b>Description</b>	S-Drive with BBU, Rail for door max 2.4m high, GLCPS Light Curtain, 2 x E960G 4-Channel Transmitters


#### Optional Controller Upgrade

<b>Part No.</b>	STAR1000EVO and GTM-E960G-50
<b>Description</b>	Transmitter Management Device and 50 x E960G Transmitters

Controller upgrade separately available. Please refer to the relevant Specification Sheet for details.

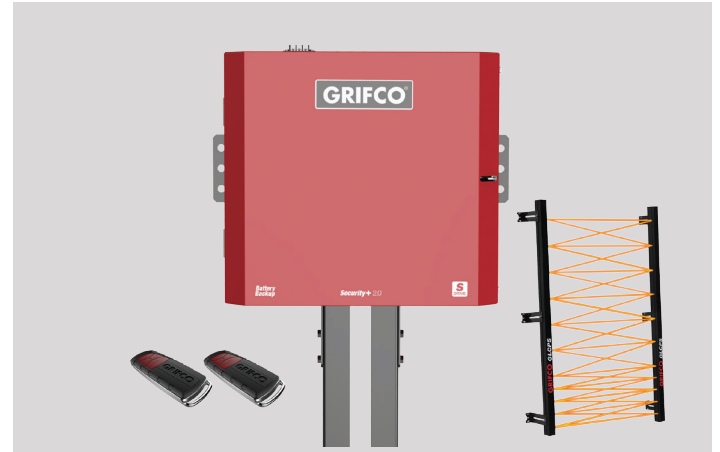

Product may differ slightly from image shown.

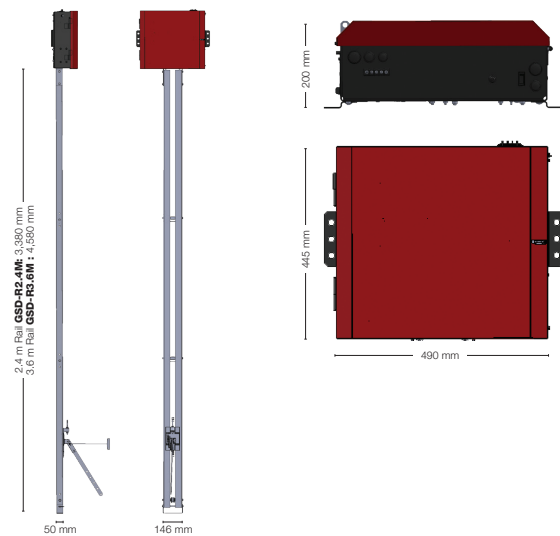

Product may differ slightly from image shown.

#### Specifications

<b>Power Supply</b>	230-240 VAC 50Hz, 400W	<b>Max Door Size</b>	26m <sup>2</sup>
<b>Op. Voltage</b>	24V DC	<b>Max Door Weight</b>	315.5kg
<b>Duty Cycle</b>	100%	<b>Max Door Height</b>	2.4m
<b>Door Speed</b>	20cm/sec		

**Chamberlain Australia Pty Ltd**  
Head Office - Unit 1, 75 Epping Rd North Ryde NSW 2113  
Manufacturing - 15 Dell Rd, West Gosford NSW 2250

**Chamberlain New Zealand Ltd**  
17A Arrenway Dr, Rosedale 0632 Auckland NZ

**AU: 1800 GRIFCO | www.grifco.com.au**  
**NZ: 0800 653 667 | www.grifco.co.nz**

**Chamberlain Branches**  
Sydney - Unit 1, 75 Epping Rd North Ryde NSW 2113  
Melbourne - Unit 18, 85-91 Keilor Park Dr Tullamarine VIC 3043  
Brisbane - Unit 19, 140 Wecker Rd Mansfield QLD 4122  
Perth - 54 Milrose Dr Malaga WA 6090